


Ceiling/Pendant Mounting
Surface Mounted and Pendant




Lens Style



PC Cover Design

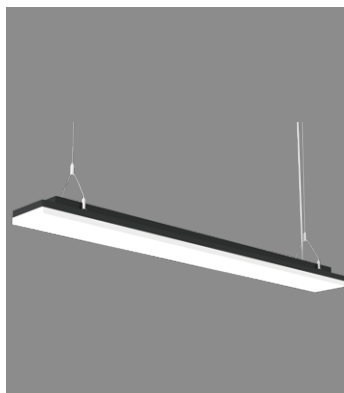


Hanging Wire PC
Cover Model


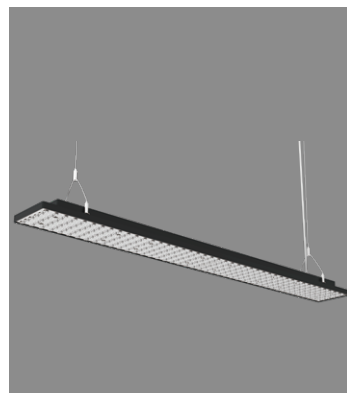


Hanging Wire
Lens Model



Analytic Figure

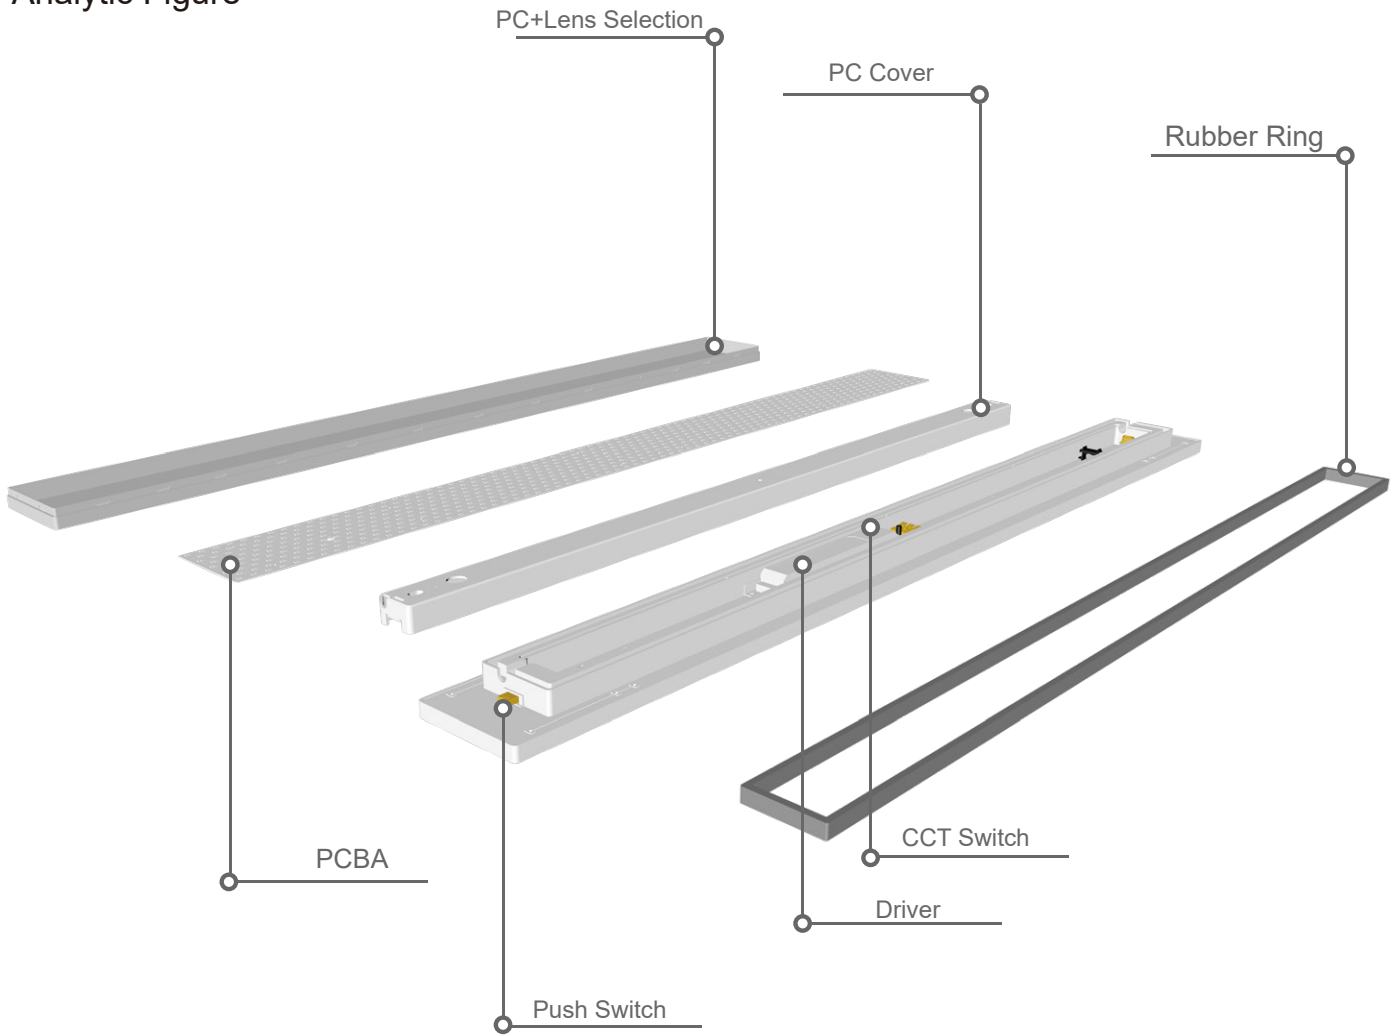

Dimension

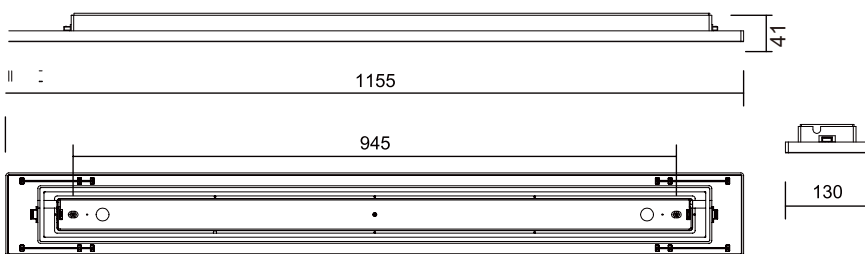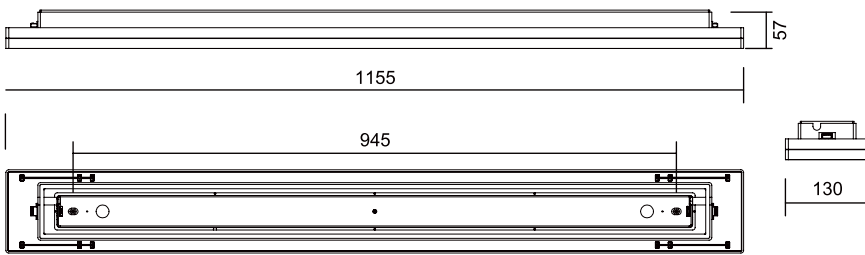



Spectrogram

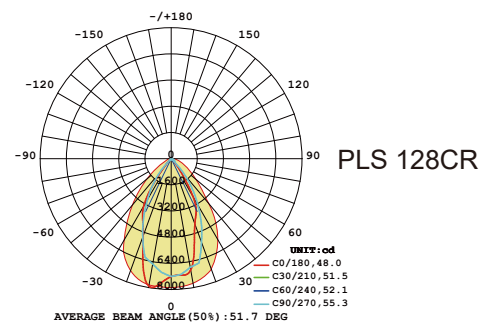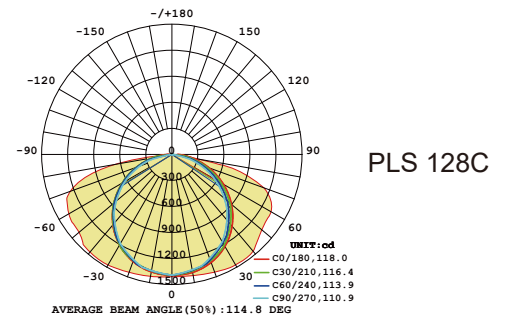


Photoelectric

Model	PLS 128C	PLS 128CR
Size	L1155*W130*H57mm	L1155*W130*H41mm
Input Power	32W/35/W48W	32W/35/W48W
CCT	3000K/4000K/6000K	4000K
CRI	>80/>90	>80/>90
Lumens Output	3840LM/4200LM/5760LM	3840LM/4200LM/5760LM
LED brand	SMD2835	SMD3030
Electric current	950mA/1050mA /1250mA	950mA/1050mA /1250mA
AC Input	AC 200-240V	AC 200-240V
Working Tp	-20 C ~+45 C	-20 C ~+45 C
IP Level	IP54	IP20
SDCM	<5	<5
Beam Angle	150°↓	70°↓
Material	PC	PC
Lifespan	50,000HS	50,000HS
UGR	<26	<13
Housing Color	White/Black	White/Black
Warranty	5Years	5Years

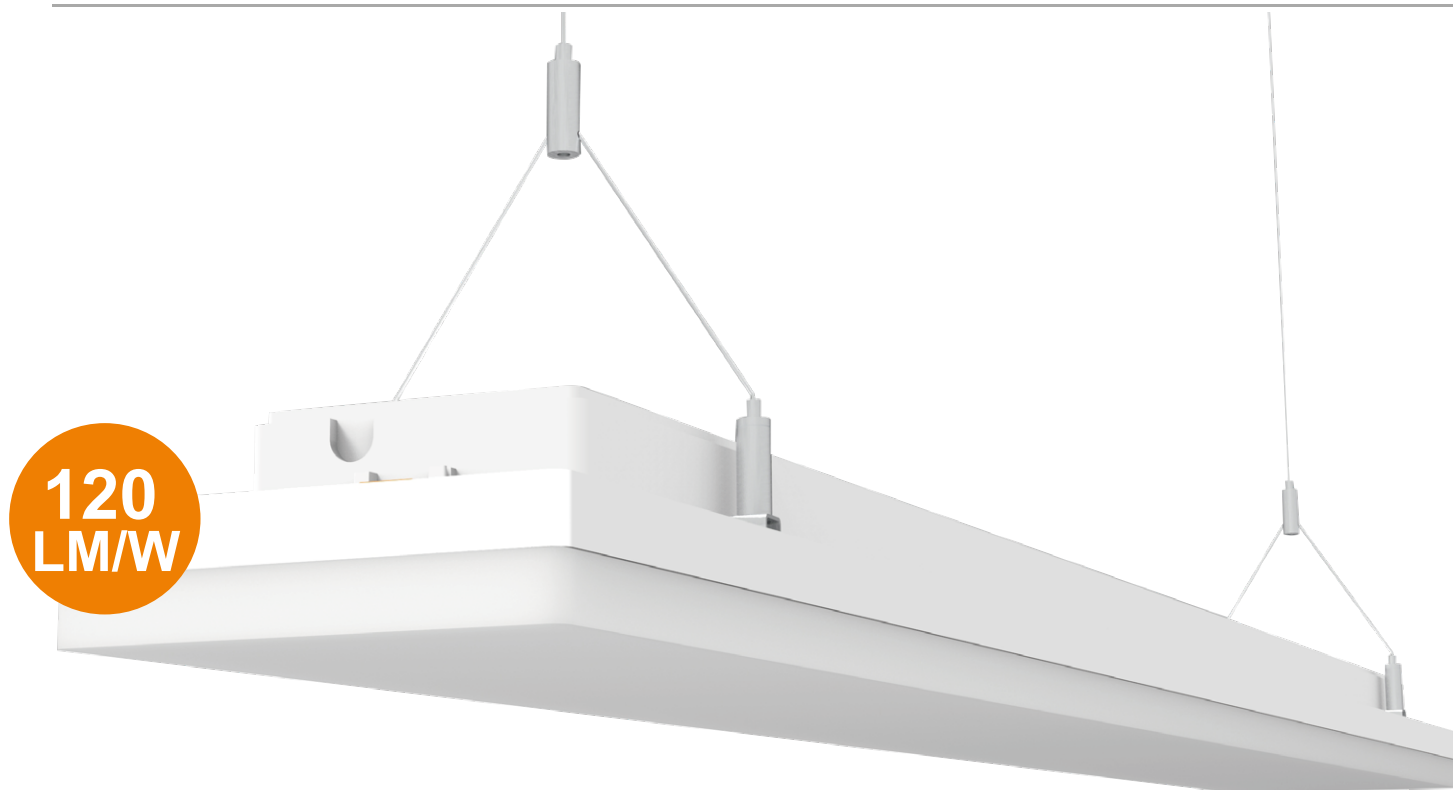


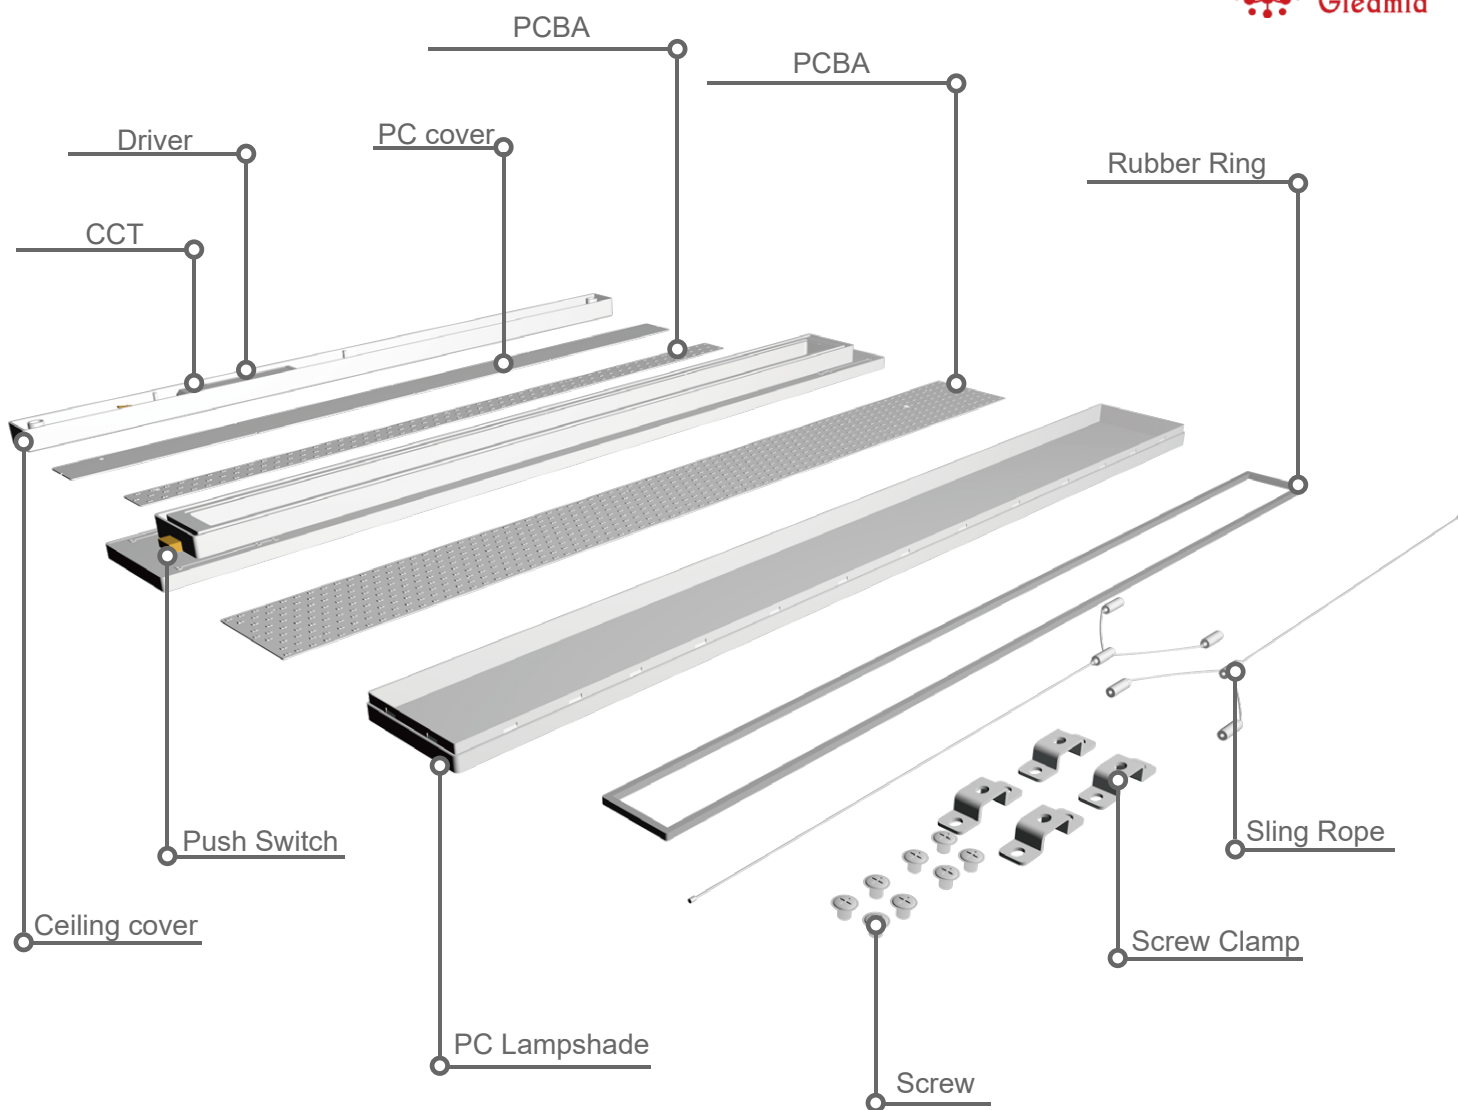


Dimension

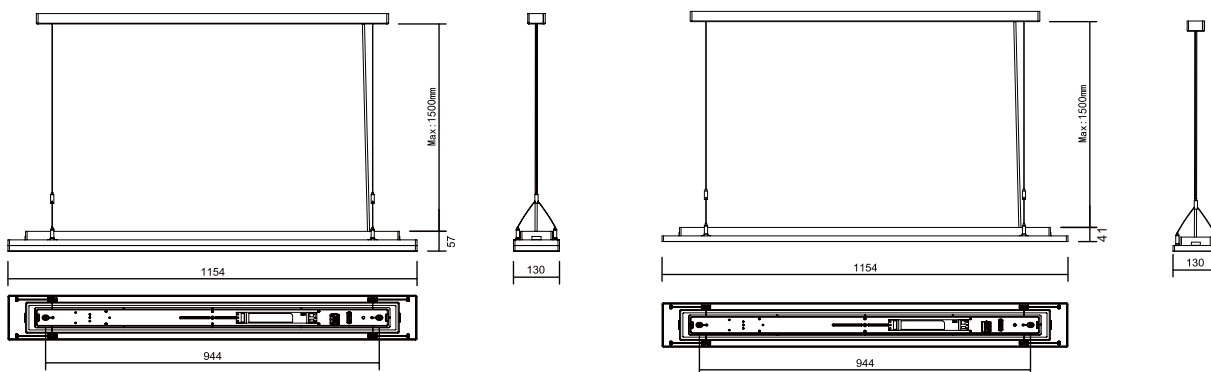

Spectrogram

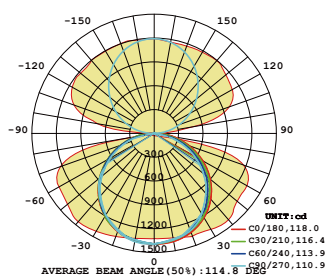

PLS 128P

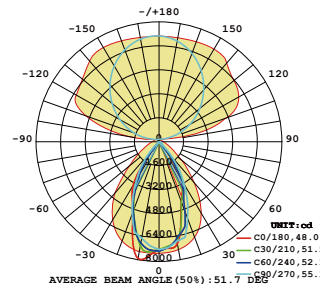

PLS 128PR

Photoelectric

Model	PLS 128P	PLS 128PR
Size	L1155*W130*H57mm	L1155*W130*H41mm
Input Power	32W/35W/48W	32W/35W/48W
CCT	3000K/4000K/6000K	4000K
CRI	>80/>90	>80/>90
Lumens Output	3840LM/4200LM/5760LM	3840LM/4200LM/5760LM
LED brand	SMD2835	SMD3030
Electric current	950mA/1050mA /1250mA	950mA/1050mA /1250mA
AC Input	AC 200-240V	AC 200-240V
Working Tp	-20℃~+45℃	-20℃~+45℃
IP Level	IP54	IP20
SDCM	<5	<5
Beam Angle	150°↓110°↑	70°↓110°↑
Material	PC	PC
Lifespan	50,000HS	50,000HS
UGR	<26	<13
Housing Color	White/Black	White/Black
Warranty	5Years	5Years





RELIABILITY

We have a strong team for the research and sales, equipped with advanced production and test machines, like pasting machines, reflow soldering, integrating spheres, etc. Gleamia persists on the principle "quality supreme, customer first, excellence pursuit", to respond to the support of vast customers by providing super quality, competitive price, fast delivery, and sincere service.

