


Description

- Unique Heat Dissipation Design, Uniform Light Emission, Higher Illumination.
- The Surface Is Bright And Clean, The Light Is Soft And Not Dazzling, And There Is No Light Radiation.
- The Frame Is Made Of High Strength Aluminium Alloy, Which Is Stronger Than The One On The Market.
- The Product Is Anti-glare, Energy-saving And Environmental Protection, Long Life, Good Color Rendering And Convenient Installation.
- CRI> 80/90, SDCM< 3, 120LM/W.

Instruction

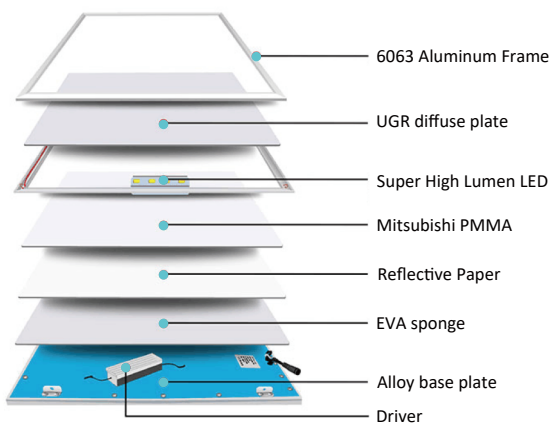

Photoelectric

Model Number:	Power	Panel Size	Hole Size	Input	Luminous Efficiency	Lumens Output	Ra	LED
GLM-SPL6060-30W	30W	615*615*10mm	595*595* 10mm	200-240V	120 LM/W	3600LM	80	SMD2835
GLM-SPL6262-30W	30W	640*640*10mm	620*620* 10mm	200-240V	120 LM/W	3600LM	80	SMD2835
GLM-SPL12030-30W	30W	1215*315*10mm	1195*295* 10mm	200-240V	120 LM/W	3600LM	80	SMD2835
GLM-SPL6060-36W	36W	615*615*10mm	595*595* 10mm	200-240V	120 LM/W	4320LM	80	SMD2835
GLM-SPL6262-36W	36W	640*640*10mm	620*620* 10mm	200-240V	120 LM/W	4320LM	80	SMD2835
GLM-SPL12030-36W	36W	1215*315*10mm	1195*295* 10mm	200-240V	120 LM/W	4320LM	80	SMD2835
GLM-SPL12060-54W	54W	1215*315*10mm	1195*295* 10mm	200-240V	120 LM/W	6480LM	80	SMD2835
GLM-SPL12060-60W	60W	1215*315*10mm	1195*295* 10mm	200-240V	120 LM/W	7200LM	80	SMD2835

*Specifications using 5700K and subject to change. All parameters +/-10%.
*The total lumen for UGR products will be lower 8% than normal products.
*Available 3W on a per project basis.




Application

- Hotel
- Commercial Purpose
- Meeting Room
- School
- Other lighting location
- Factory & Office
- Hospital
- Residential & Institution



Dimensions

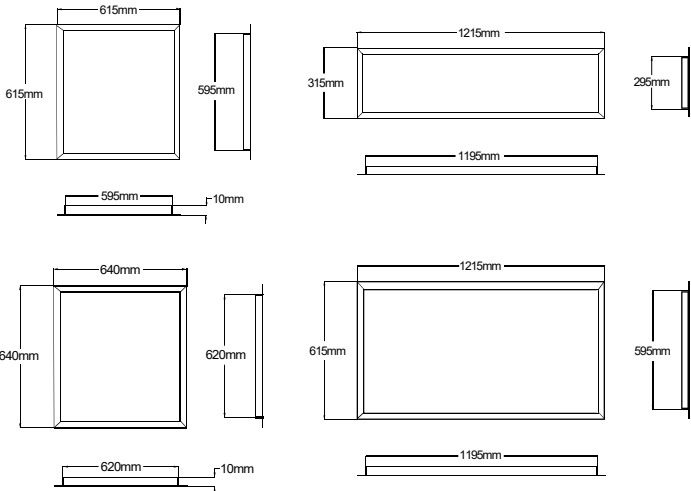

Gleamia Panel Light Recessed Version 120LM/W

Electrical Driver

Input	AC200-240V (or AC100-277V optional)
Frequency	50/60Hz
Output Voltage	DC30-42V
Relevant	EN55015 EN550221 IEC61347-1
Power Factor	>0.9
THD	<20%
Power Efficiency	>85%
Power Brand	AGT/Lifud/BOKE Flicker Free
Protection	Surge Short Circuit Over Voltage Over Current Over Temp.
MTBF	Minimum MTBF 50,000 hours at 100% load & 40°C

Environment

Operating Temperature	-20°C~ 50°C
Storage Temperature	-20°C~ 60°C
Operating Humidity	90% Rh or below(@-20°C~40°C)
Application Area	Indoors
Lifespan	50,000 Hrs




Light source

LED Type	2835
Color Accuracy(CRI)	80
Color Temperature	3000K/4000K/5000K/5700K


Driver



Electrical Connection Diagram

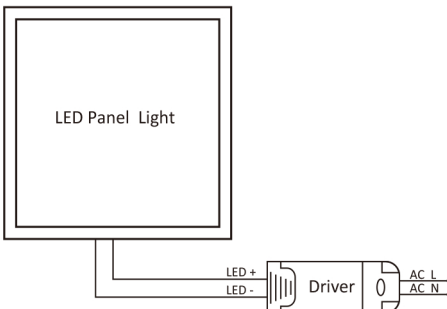

Installation

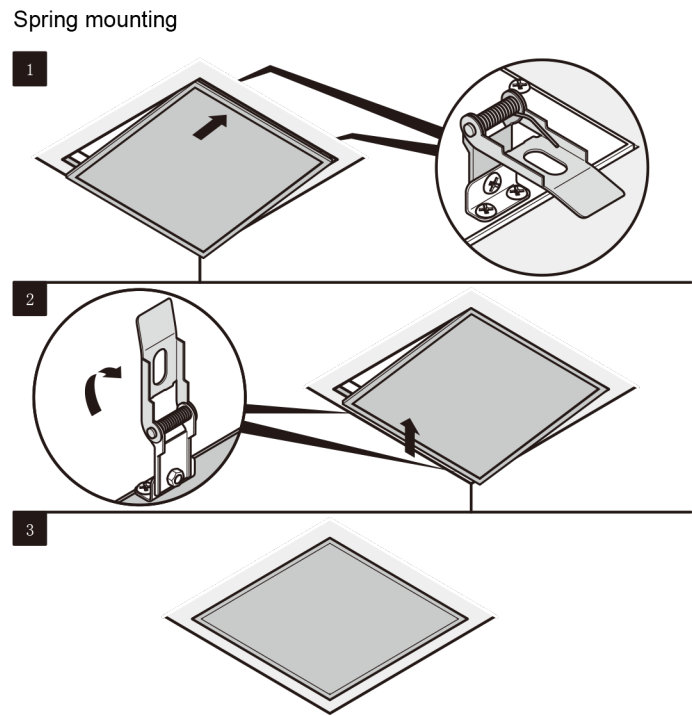

Packing List

Item No	Outer Carton (L*W*H)	Q'ty/CTN	G.W/CTN	QTY / 20GP	Volume/Carton(m³)
GLM-SPL6060-30W/36W	700*235*710mm	5PCS	22.45kg	1200PCS	0.1168
GLM-SPL6262-30W/36W	700*235*750mm	5PCS	23.9kg	1200PCS	0.1234
GLM-SPL12030-30W/36W	1300*400*235mm	5PCS	22.05kg	1200PCS	0.1222
GLM-SPL12060-54W	1300*130*700mm	2PCS	18.2kg	500PCS	0.1183
GLM-SPL12060-60W	1300*130*700mm	2PCS	18.8kg	500PCS	0.1183

