


Ceiling ,Wall Luminaires

GLM-DOR260D (ON/OFF)

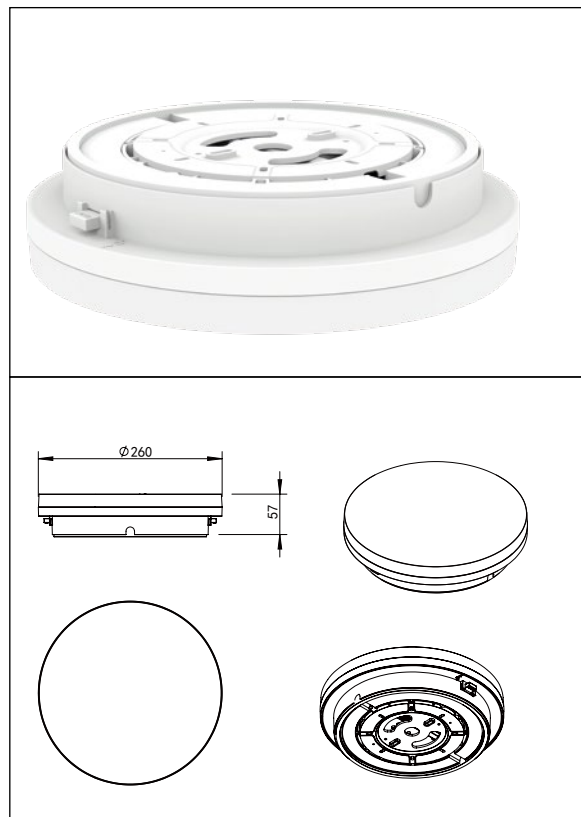


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260D (ON/OFF)
Size	Φ260*57mm
Input Power	8/10/15W
Current	115/140/200mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application




Energy Efficiency Rating

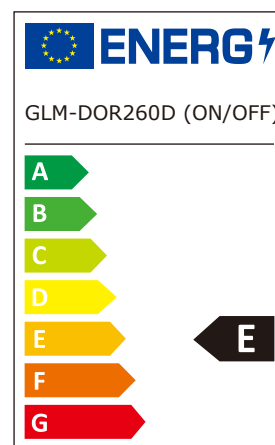

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires HF Sensor GLM-DOR260DS (HF)

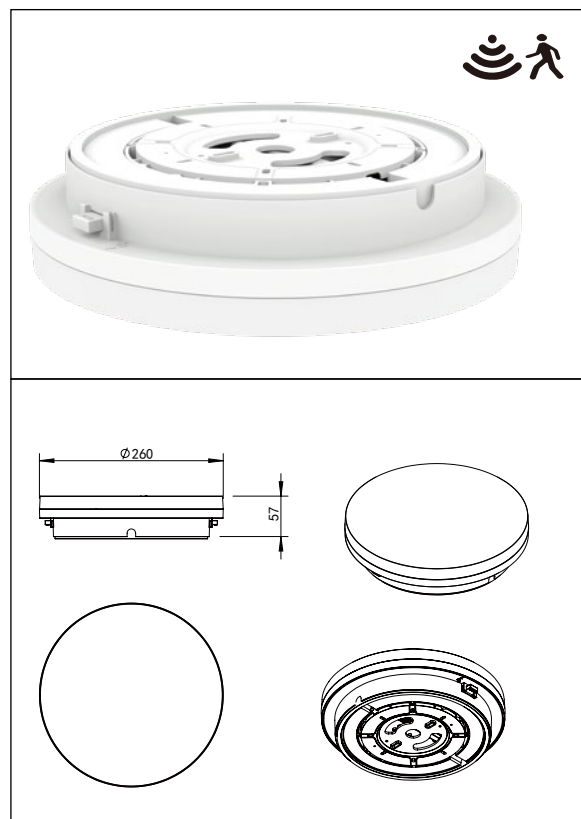


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260DS (HF)
Size	Φ260*57mm
Input Power	8/10/15W
Current	115/140/200mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application




Energy Efficiency Rating

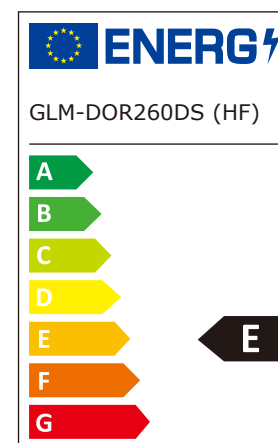

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires PIR Sensor GLM-DOR260DS (PIR)

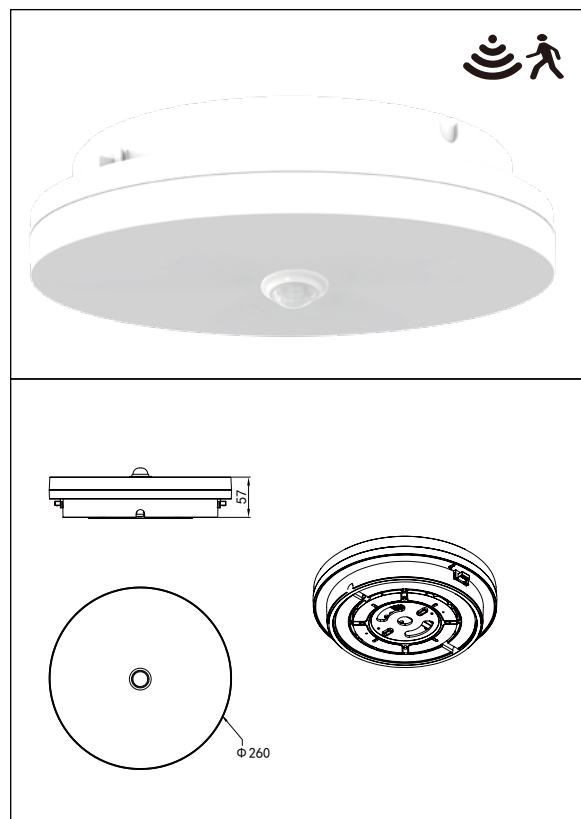


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260DS (PIR)
Size	Φ260*57mm
Input Power	8/10/15W
Current	115/140/200mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application




Energy Efficiency Rating

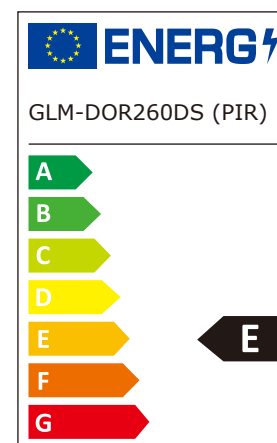

Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ✉ Email:mark@gleamia.net 🌐 Web:www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires Master-Slave GLM-DOR260DS (Master)

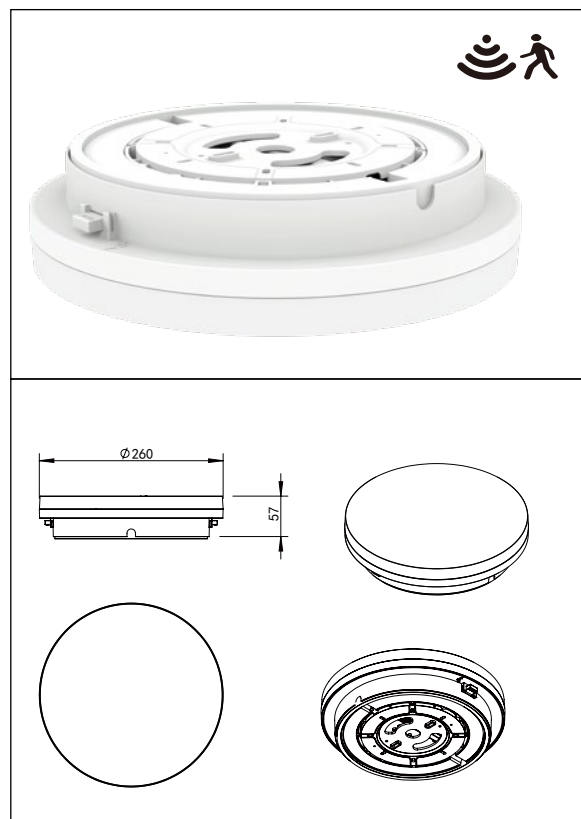


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260DS (Master)
Size	Φ260*57mm
Input Power	8/10/15W
Current	115/140/200mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application



Energy Efficiency Rating

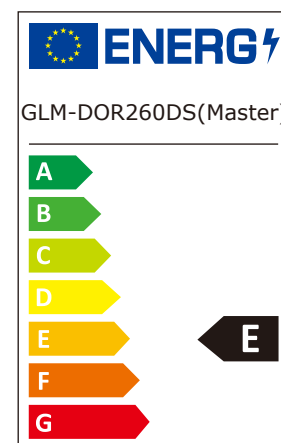


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

GLM-DOR260DA (DT6)

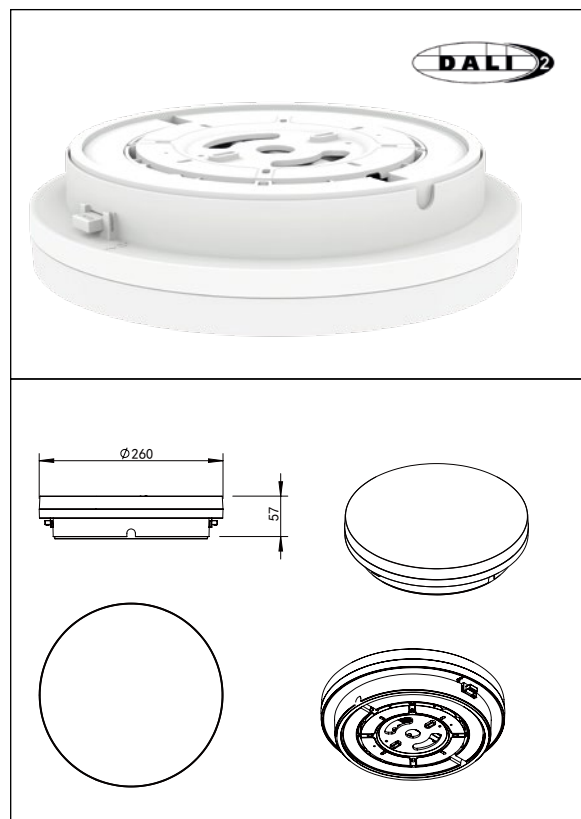


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260DA (DT6)
Size	Φ260*57mm
Input Power	8/10/15W
Current	220/260/380mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	TCI
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC30-38V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application



Energy Efficiency Rating

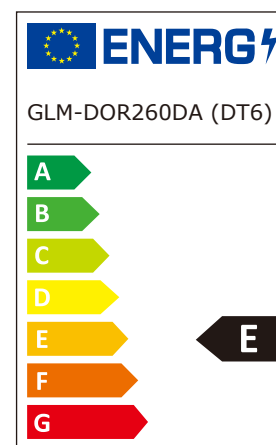


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

GLM-DOR260DA (DT8)

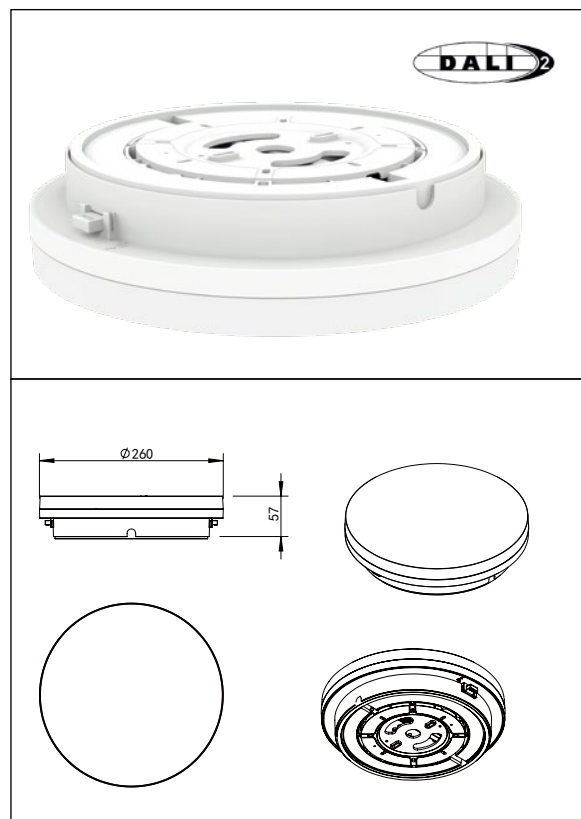


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K-6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 10W-12W-14W.
- illumination luminous flux 120-1680lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260DA (DT8)
Size	Φ260*57mm
Input Power	10/12/14W
Current	260/290/350mA
lumen Efficiency	120LM/W
Lumens Output	1200/1440/1680LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AI Dimming
Ra	90
CCT	3000K-6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC30-38V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application



Energy Efficiency Rating

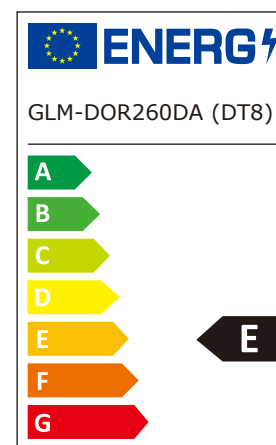


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

Emergency(self-test)

GLM-DOR260EM

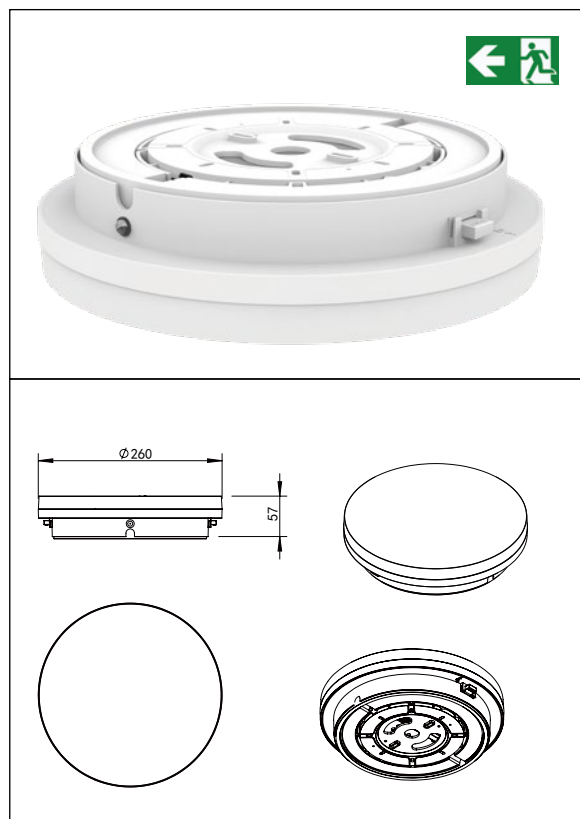


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260EM
Size	Φ260*57mm
Input Power	8/10/15W
Current	115/140/200mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Emergency Time	2H
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application



Energy Efficiency Rating

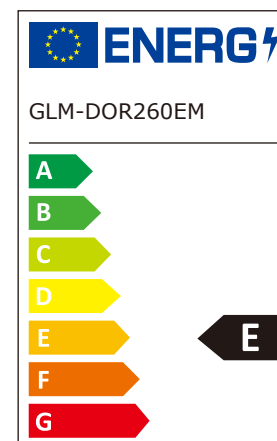


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

HF Sensor+Emergency

GLM-DOR260 (EMS)

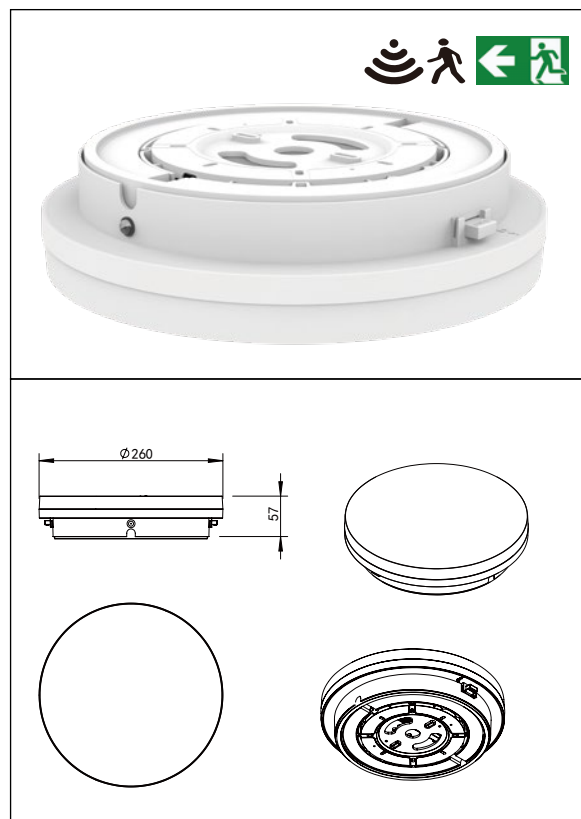


Description

- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade.
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 8W-10W-15W.
- illumination luminous flux 960-1800lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR260 (EMS)
Size	Φ260*57mm
Input Power	8/10/15W
Current	115/140/200mA
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	384
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Emergency Time	2H
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L270*W68*H270mm
PCS/CTN	10PCS
Outer Box Size(L*W*H)	L565*W365*H295mm

Application



Energy Efficiency Rating

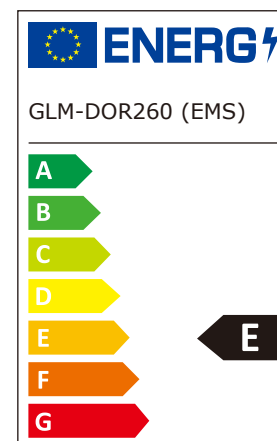

Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ✉ Email:mark@gleamia.net 🌐 Web:www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China