


Ceiling ,Wall Luminaires

GLM-DOR450D (ON/OFF)

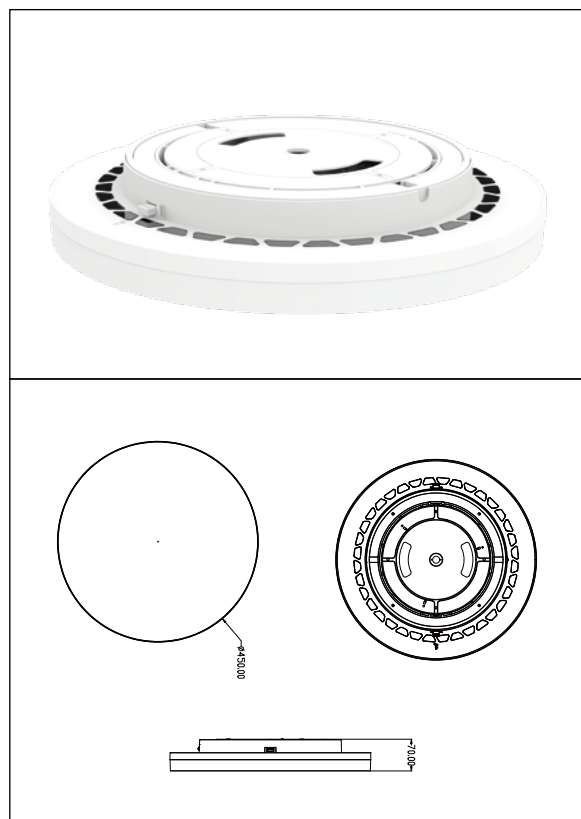


Description

- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR450D (ON/OFF)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	200/230/260mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC110-150V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm


Application



On the ceiling




Suspended line



Suspended rod


Energy Efficiency Rating

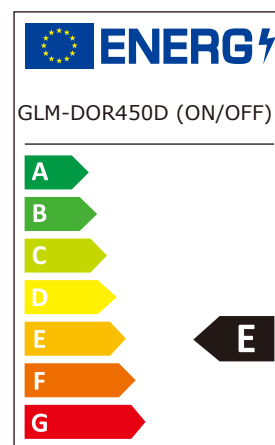

Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ☎ Email:mark@gleamia.net ☎ Web:www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires HF Sensor GLM-DOR450DS (HF)

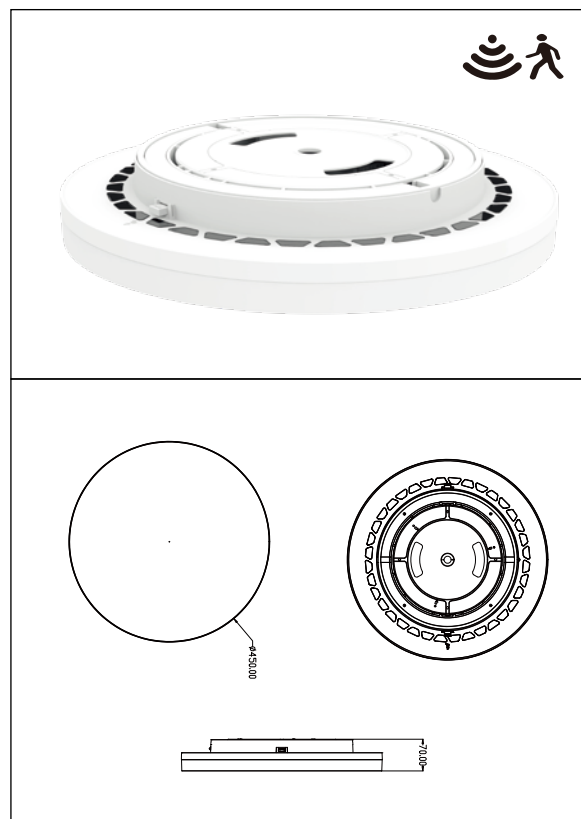


Description

- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR450DS (HF)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	200/230/260mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC110-150V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm

Application

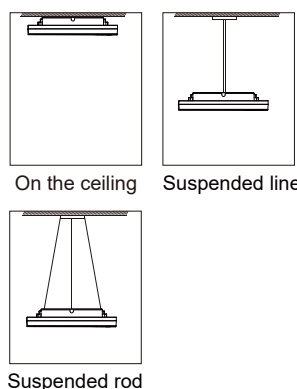


Energy Efficiency Rating

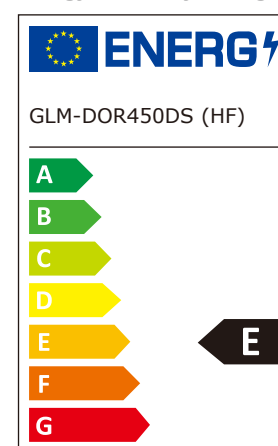

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires PIR Sensor GLM-DOR450DS (PIR)

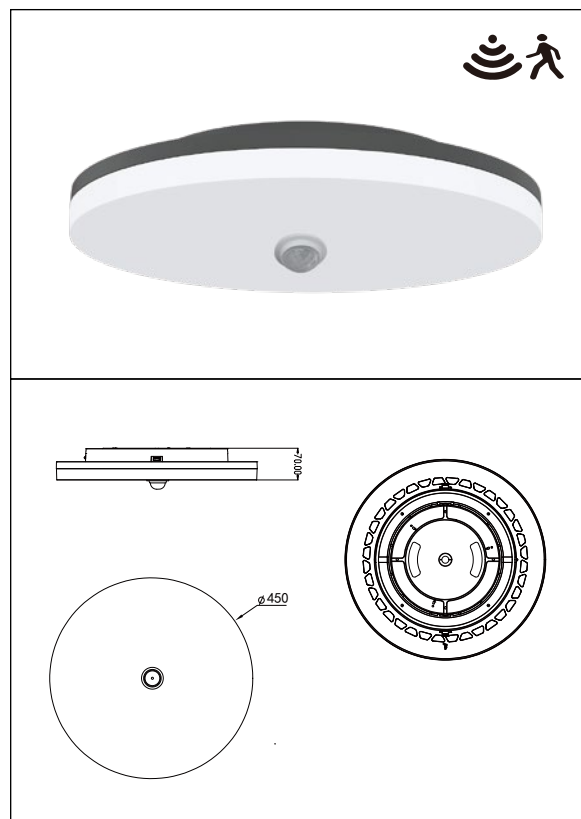

Description


- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.




Product Features

Model NO	GLM-DOR260DS (PIR)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	200/230/260mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC110-150V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm

Application

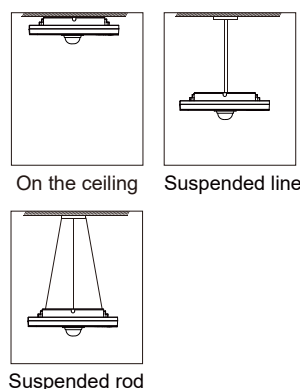


Energy Efficiency Rating

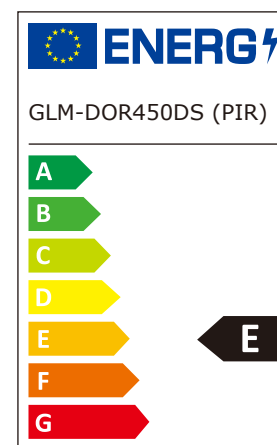

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires Master-Slave GLM-DOR450DS (Master)

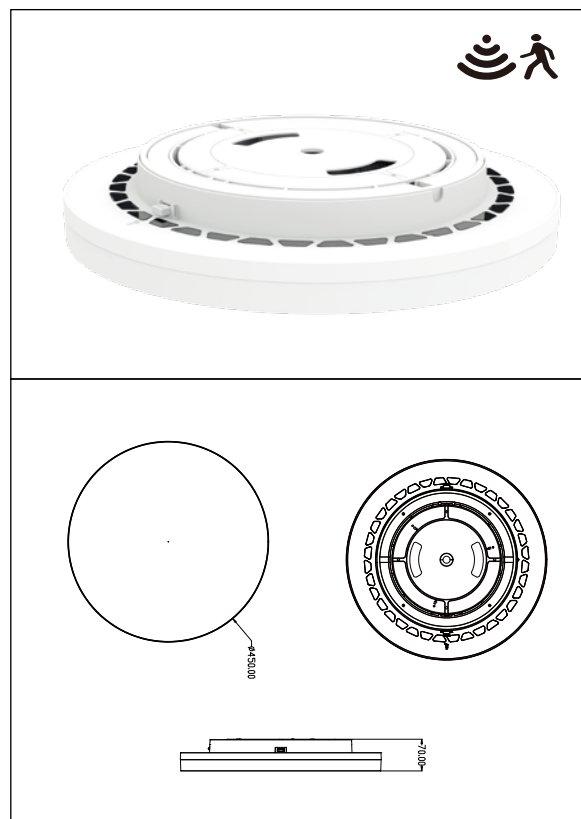

Description


- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.




Product Features

Model NO	GLM-DOR450DS (Master)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	200/230/260mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC110-150V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm

Application

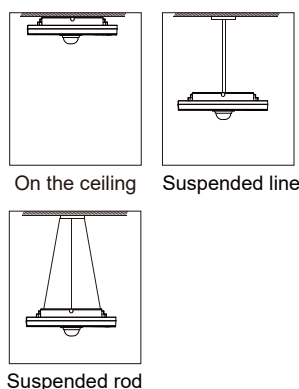

Energy Efficiency Rating

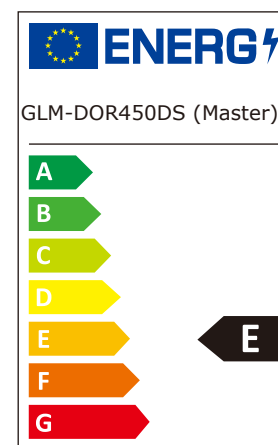


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

GLM-DOR450DA (DT6)

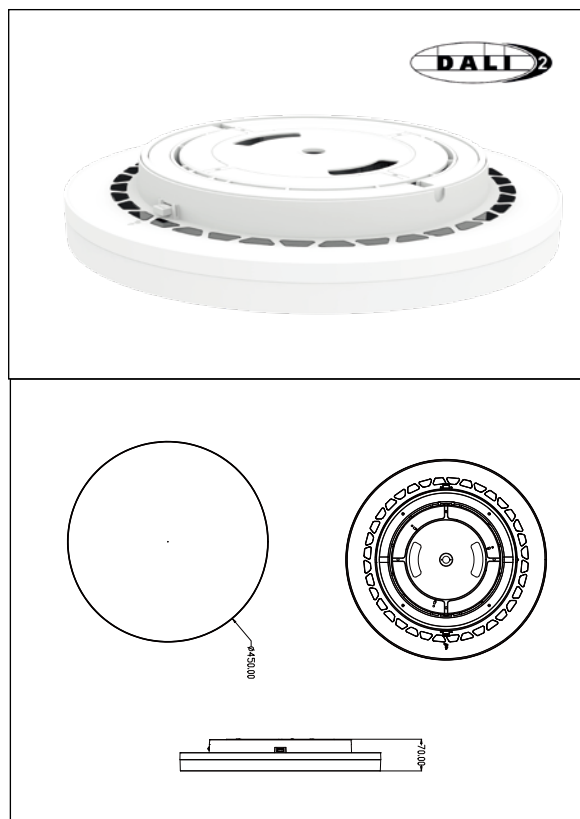


Description

- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR450DA (DT6)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	700/850/950mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	TCI
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC10-40V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm

Application

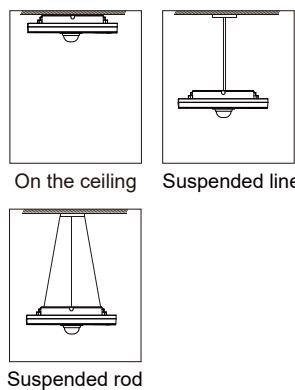

Energy Efficiency Rating

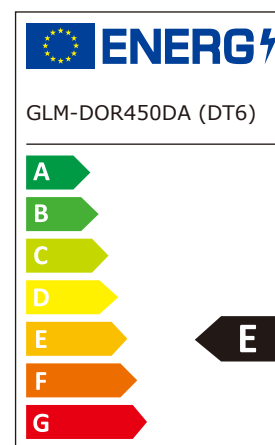


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

GLM-DOR450DA (DT8)

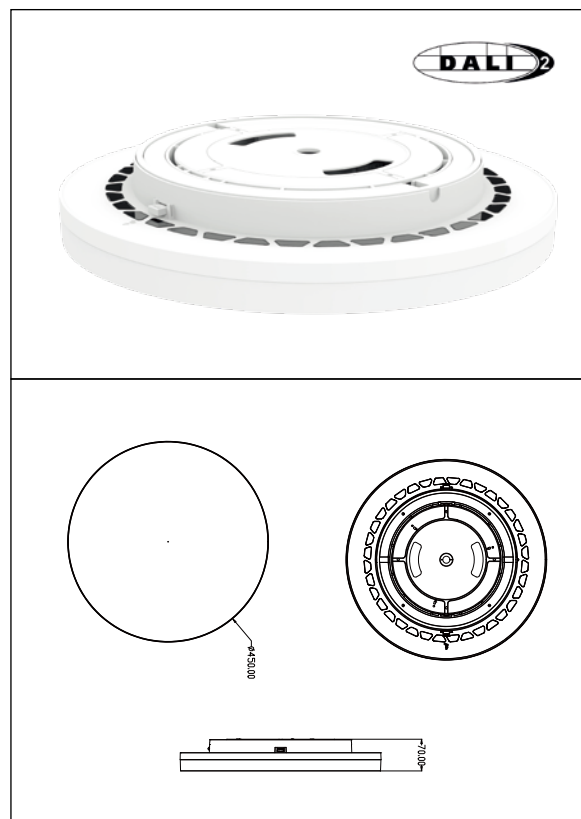


Description

- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K-6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR450DA (DT8)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	700/850/950mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	BOKE
Ra	90
CCT	3000K-6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC24-42V
Power Factor	>0.9
THD	<15%
Power Efficiency	>84%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm

Application

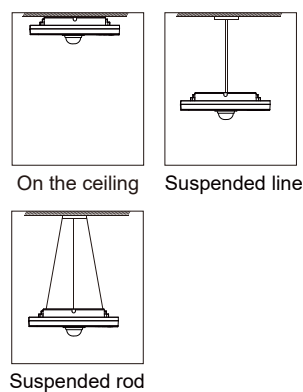

Energy Efficiency Rating

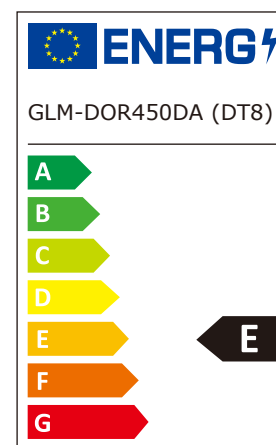


Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

Emergency(self-test)

GLM-DOR450EM

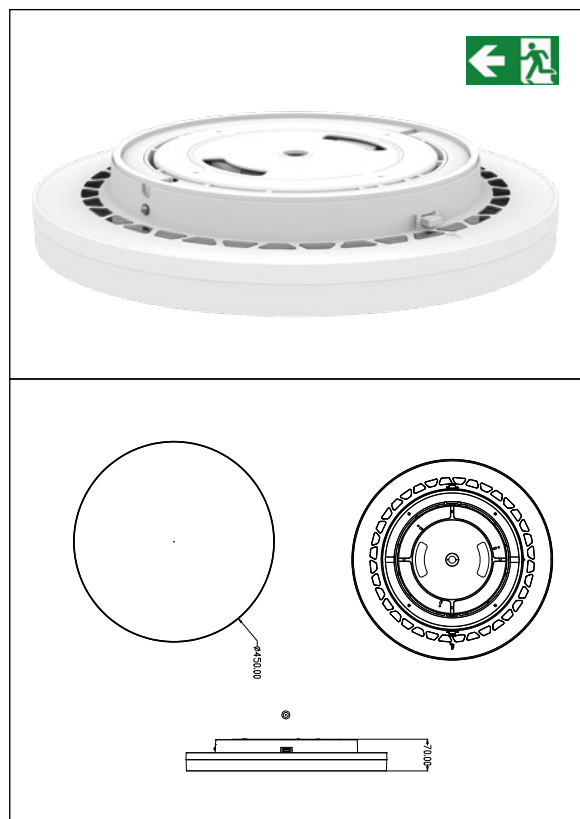


Description

- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.


Product Features

Model NO	GLM-DOR450EM
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	200/230/260mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Emergency Time	3H
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm


Application



On the ceiling




Suspended line



Suspended rod


Energy Efficiency Rating

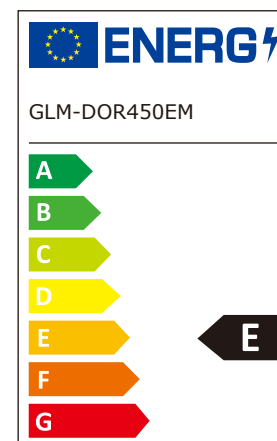

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires HF Sensor+Emergency GLM-DOR450(EMS)

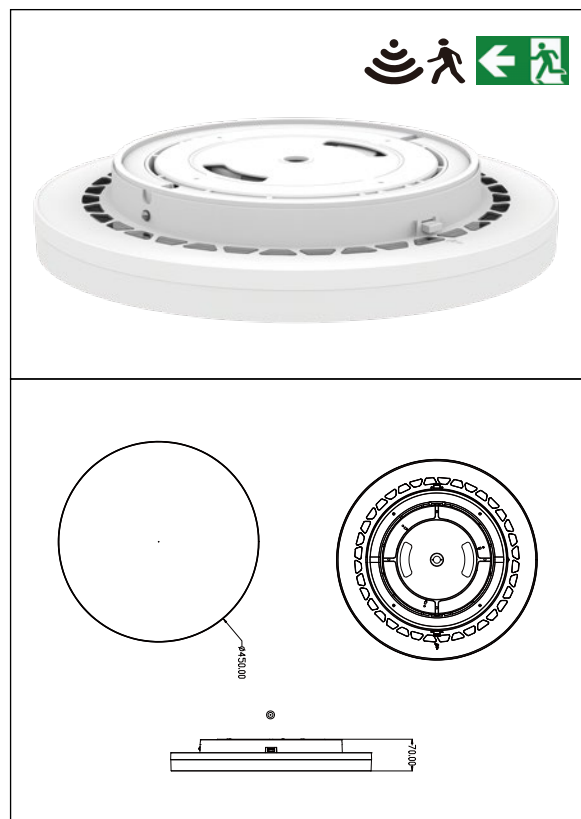

Description


- This product has uplight & downlight with 3 installation methods: suspended with pole, suspended with steel rope, ceiling light.
- Rotundity LED wall lights and ceiling lights own Polycarbonate lampshade,
- Simple Luminaire mounting adapter on wall or ceiling.
- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-32W-36W.
- illumination luminous flux 3360-4320lm depends on color temperature and power.




Product Features

Model NO	GLM-DOR450(EMS)
Size	Φ450*70mm
Input Power	28/32/36W Switchable
Current	200/230/260mA
lumen Efficiency	120LM/W
Lumens Output	3360/3840/4320LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	576
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Emergency Time	3H
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L460*W460*H83mm
PCS/CTN	5PCS
Outer Box Size(L*W*H)	L480*W435*H480mm

Application

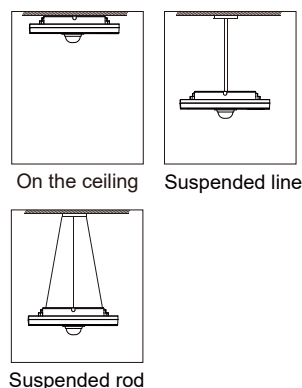

Energy Efficiency Rating

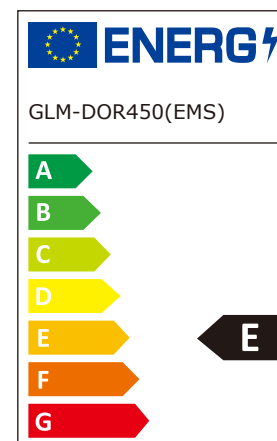

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China