


Ceiling ,Wall Luminaires

GLM-DOS620D(ON/OFF)

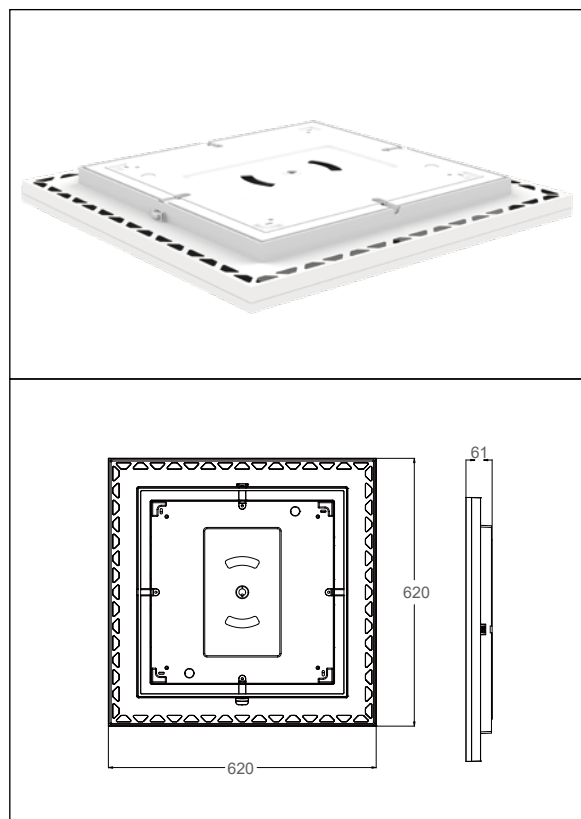


Description

- ceiling lightsPolycarbonate lampshade, white.
- Simple Luminaire mounting adapteron the wall or ceiling.
- Two-sided fast shutter For tool-less lighting housingsMounted on the adapter.Good heat dissipation.
- color temperature 3000,The 4000 or 6000K can be turned on with a slide switch.
- The back of the lamp - before installation - adjustable.
- Adjustable 28W, 34W or 40W.
- 3360-4800LMlm depends on color temperature and performance.

Product Features


Model NO	GLM-DOS620D(ON/OFF)
Size	620*620*61mm
Input Power	28/34/40W Switchable
Current	250/300/350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	2560
Driver	Tridnoic
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC50-133V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White
Inner Box Size	L630*W70*H630mm
PCS/CTN	3PCS
Outer Box Size(L*W*H)	L650*W230*H650mm

Applicagtion



On the ceiling


Energy Efficiency Rating

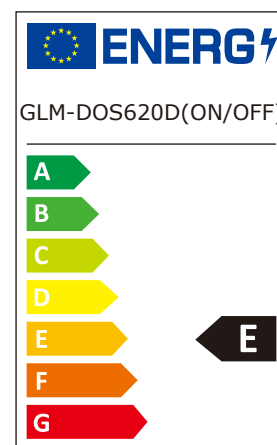

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires Master-Slave GLM-DOS620DS(Master)

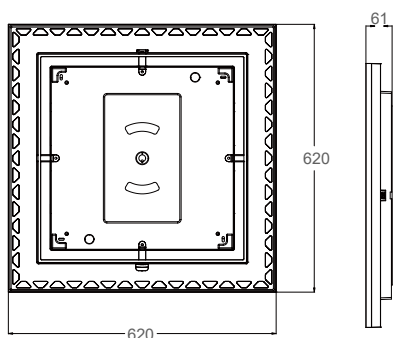


Description

- ceiling lightsPolycarbonate lampshade, white.
- Simple Luminaire mounting adapteron the wall or ceiling.
- Two-sided fast shutter For tool-less lighting housingsMounted on the adapter.Good heat dissipation.
- color temperature 3000,The 4000 or 6000K can be turned on with a slide switch.
- The back of the lamp - before installation - adjustable.
- Adjustable 28W, 34W or 40W.
- 3360-4800LMm depends on color temperature and performance.

Product Features


Model NO	GLM-DOS620DS(Master)
Size	620*620*61mm
Input Power	28/34/40W Switchable
Current	250/300/350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	2560
Driver	Philips
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC70-125V
Power Factor	>0.9
THD	<20%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White
Inner Box Size	L630*W70*H630mm
PCS/CTN	3PCS
Outer Box Size(L*W*H)	L650*W230*H650mm

Appicagtion



On the ceiling

Energy Efficiency Rating

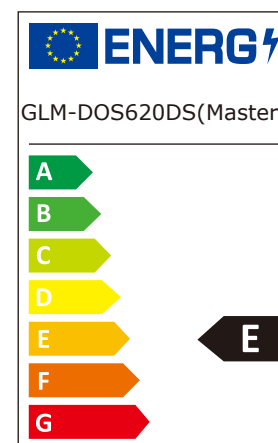


Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ☎ Email:mark@gleamia.net ☎ Web:www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires

GLM-DOS620DA(DT6)

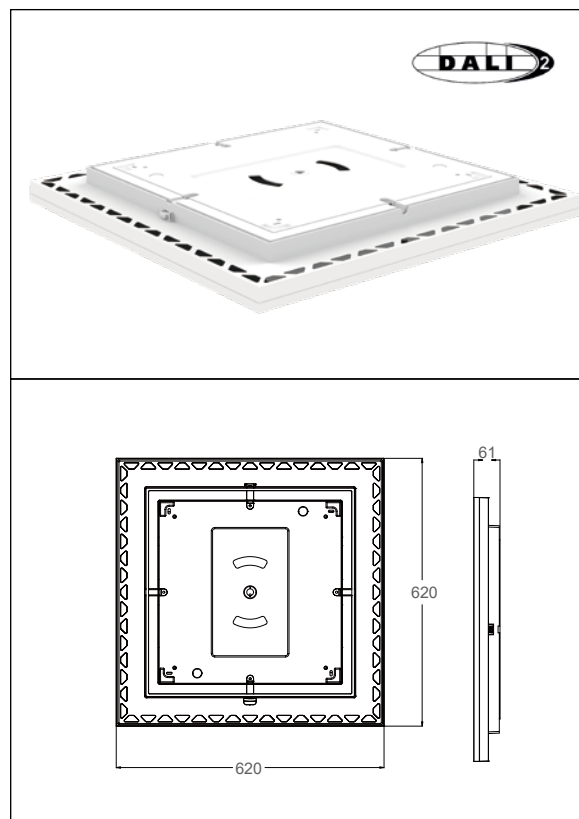


Product Features

Model NO	GLM-DOS620DA(DT6)
Size	620*620*61mm
Input Power	28/34/40W Switchable
Current	250/300/350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	2560
Driver	BOKE
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC54-240V
Power Factor	>0.9
THD	<15%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White
Inner Box Size	L630*W70*H630mm
PCS/CTN	3PCS
Outer Box Size(L*W*H)	L650*W230*H650mm

Description


- ceiling lights Polycarbonate lampshade, white.
- Simple Luminaire mounting adapter on the wall or ceiling.
- Two-sided fast shutter For tool-less lighting housings Mounted on the adapter. Good heat dissipation.
- color temperature 3000, The 4000 or 6000K can be turned on with a slide switch.
- The back of the lamp - before installation - adjustable.
- Adjustable 28W, 34W or 40W.
- 3360-4800LM depends on color temperature and performance.

Applicagtion



On the ceiling


Energy Efficiency Rating

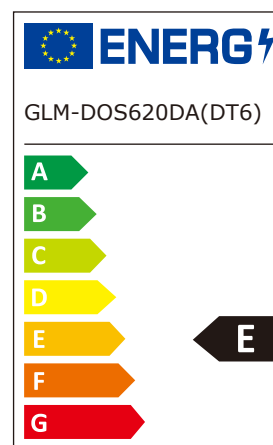

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Ceiling ,Wall Luminaires Emergency(self-test) GLM-DOS620EM

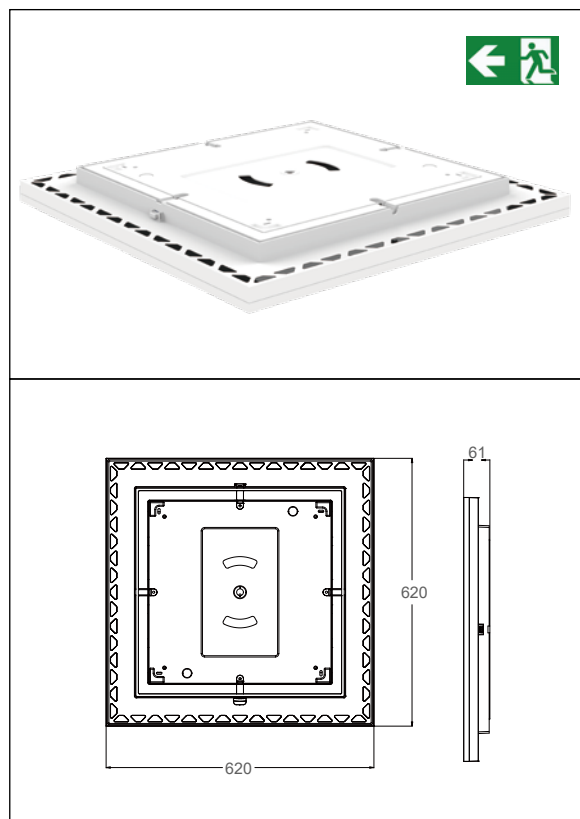


Description

- ceiling lights Polycarbonate lampshade, white.
- Simple Luminaire mounting adapter on the wall or ceiling.
- Two-sided fast shutter For tool-less lighting housings Mounted on the adapter. Good heat dissipation.
- color temperature 3000, The 4000 or 6000K can be turned on with a slide switch.
- The back of the lamp - before installation - adjustable.
- Adjustable 40W.
- 4800lm depends on color temperature and performance.


Product Features

Model NO	GLM-DOS620EM
Size	620*620*61mm
Input Power	40W
Current	350mA
lumen Efficiency	120LM/W
Lumens Output	4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	2560
Driver	Bridgelux
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC60-129V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White
Inner Box Size	L630*W70*H630mm
PCS/CTN	3PCS
Outer Box Size(L*W*H)	L650*W230*H650mm

Application



Energy Efficiency Rating

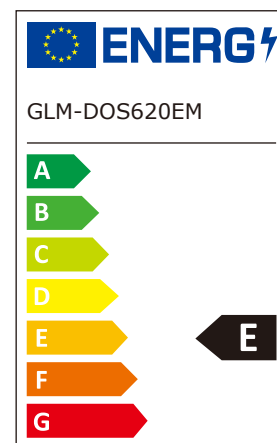

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China