


Surface Mounted GLM-PLS128C1200 (ON/OFF)

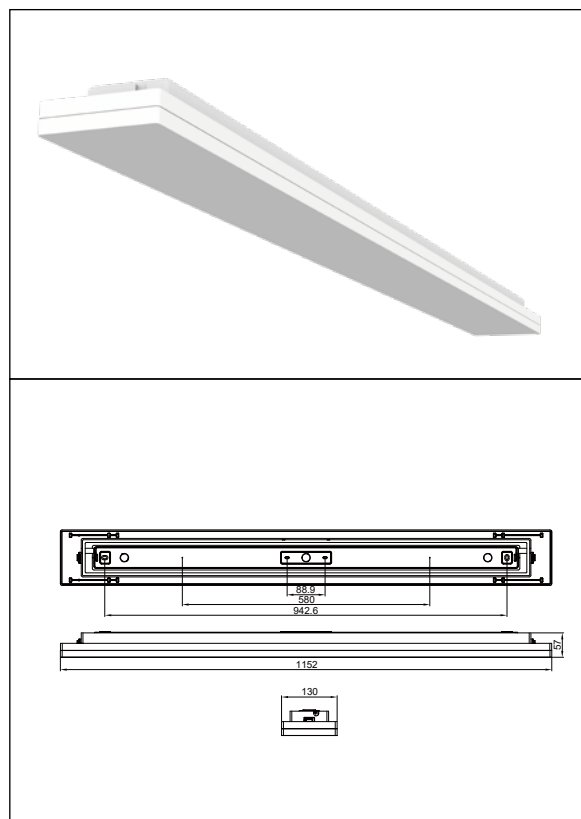


Description

- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-34W-40W.
- illumination luminous flux3360-4800lm depends on color temperature and power.

Product Features


Model NO	GLM-PLS128C1200 (ON/OFF)
Size	L1152*W130*H57mm
Input Power	28W-34W-40W
Current	250mA-300mA-350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	1040
Driver	TRIDONIC
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC50-133V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L1180*W140*H68mm
PCS/CTN	6PCS
Outer Box Size(L*W*H)	L1200*W225*H300mm

Application



On the ceiling


Energy Efficiency Rating

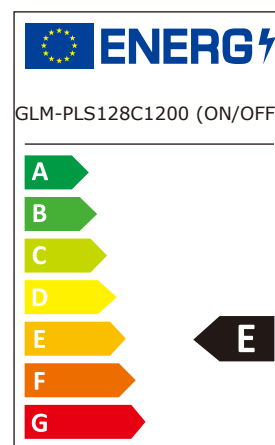

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Surface Mounted Master-Slave GLM-PLS128C1200 (Master)

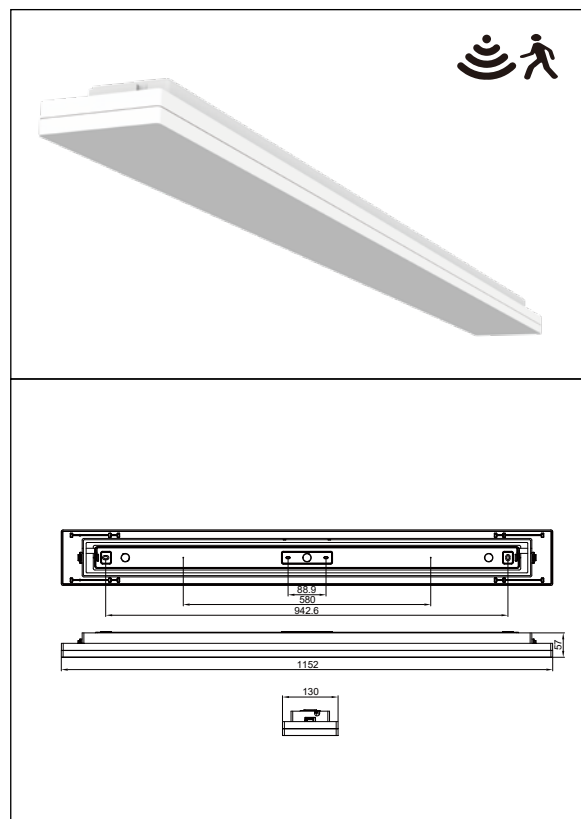


Description

- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-34W-40W.
- illumination luminous flux3360-4800lm depends on color temperature and power.

Product Features


Model NO	GLM-PLS128C1200 (Master)
Size	L1152*W130*H57mm
Input Power	28W-34W-40W
Current	250mA-300mA-350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	1040
Driver	Philips
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC70-125V
Power Factor	>0.9
THD	<20%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L1180*W140*H68mm
PCS/CTN	6PCS
Outer Box Size(L*W*H)	L1200*W225*H300mm

Application



On the ceiling

Energy Efficiency Rating

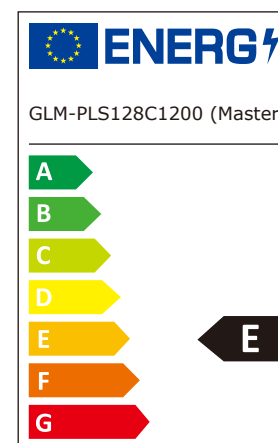


Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ✉ Email:mark@gleamia.net 🌐 Web:www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Surface Mounted

GLM-PLS128C1200DA (DT6)

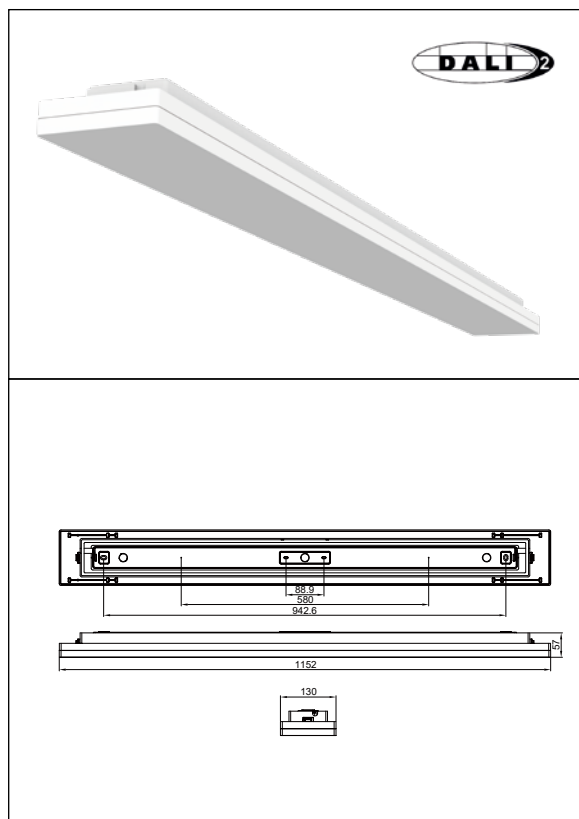


Description

- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 28W-34W-40W.
- illumination luminous flux3360-4800lm depends on color temperature and power.

Product Features


Model NO	GLM-PLS128C1200DA (DT6)
Size	L1152*W130*H57mm
Input Power	28W-34W-40W
Current	250mA-300mA-350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	1040
Driver	BOKE
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC54-240V
Power Factor	>0.9
THD	<15%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L1180*W140*H68mm
PCS/CTN	6PCS
Outer Box Size(L*W*H)	L1200*W225*H300mm

Application



On the ceiling

Energy Efficiency Rating

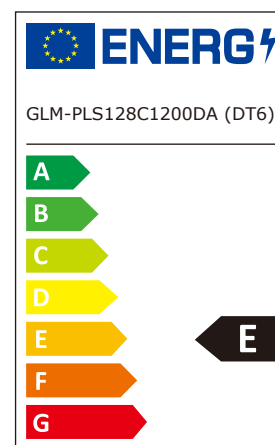


Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ☎ Email:mark@gleamia.net ☎ Web:www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Surface Mounted

GLM-PLS128C1200DA (DT8)

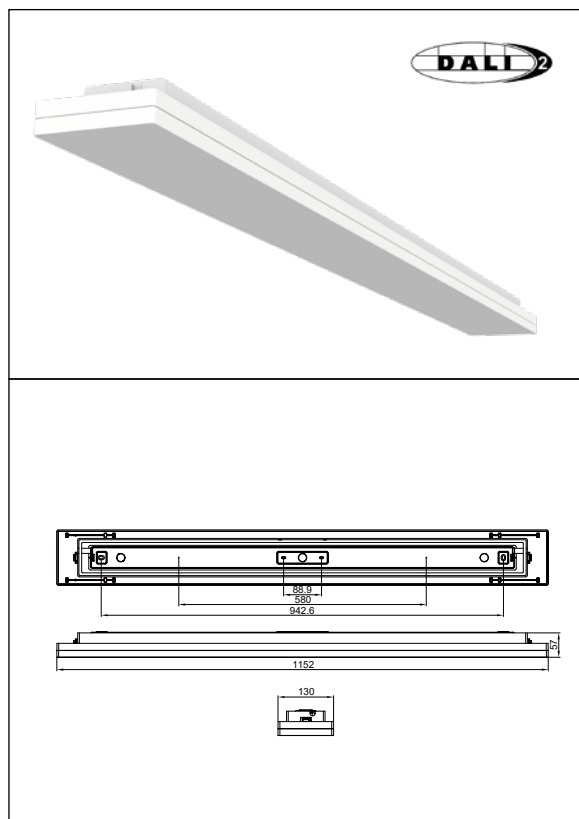


Description

- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 40W.
- illumination luminous flux 4800lm depends on color temperature and power.

Product Features


Model NO	GLM-PLS128C1200DA (DT8)
Size	L1152*W130*H57mm
Input Power	40W
Current	350mA
lumen Efficiency	120LM/W
Lumens Output	4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	1040
Driver	SUNRICHER
Ra	90
CCT	3000K-6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC50-220V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L1180*W140*H68mm
PCS/CTN	6PCS
Outer Box Size(L*W*H)	L1200*W225*H300mm

Application



On the ceiling


Energy Efficiency Rating

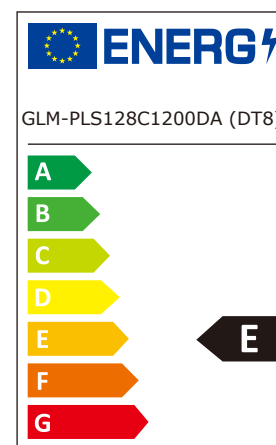

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China

Surface Mounted Emergency(self-test) GLM-PLS128C1200EM

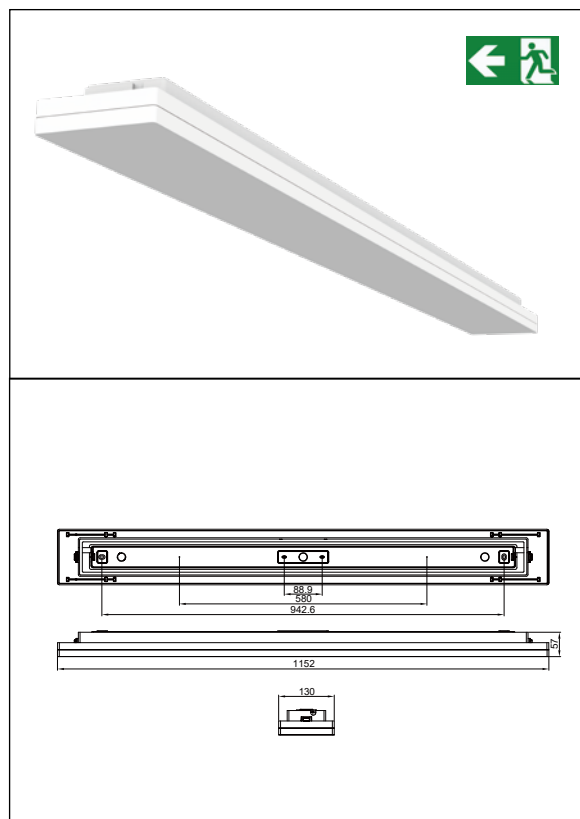


Description

- Two-sided fast shutter for tool-free lighting mounted on the adapter.
- Accessories are safe. LED-SMD technology on metal core board has a good heat dissipation.
- Color temperature 3000K, 4000K or 6000K switchable by a slide on the back of the lamp, adjustable before installation.
- Adjustable to 40W.
- illumination luminous flux 4800lm depends on color temperature and power.

Product Features


Model NO	GLM-PLS128C1200EM
Size	L1152*W130*H57mm
Input Power	40W
Current	350 mA
lumen Efficiency	120LM/W
Lumens Output	4800LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	1040
Driver	Bridgelux
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC60-129V
Power Factor	>0.9
THD	<15%
Power Efficiency	>91%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L1180*W140*H68mm
PCS/CTN	6PCS
Outer Box Size(L*W*H)	L1200*W225*H300mm

Application



On the ceiling

Energy Efficiency Rating

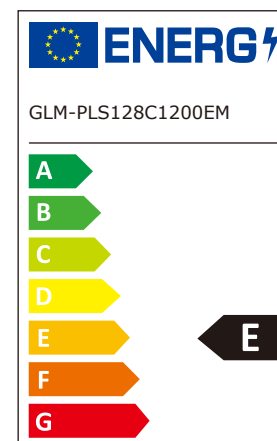

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China