


Surface Mounted GLM-PLS128C300 (ON/OFF)

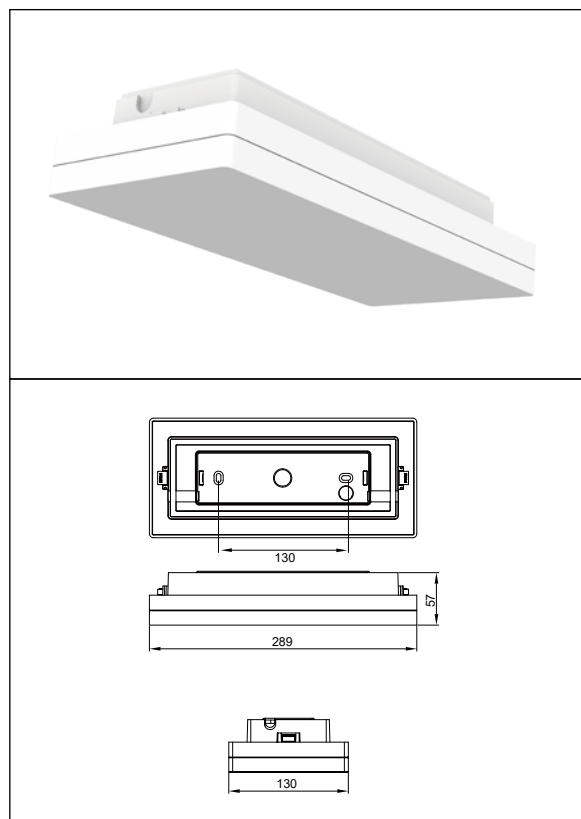


Description

- A simple lamp installation adapter can be installed on walls .
- Double sided fast shutter, used tool free lighting housings installed on adapters.
- LED-SMD technology has excellent heat dissipation performance on metal core boards.
- Adjustable to 5W-7W-10W.
- 600-1200lm, Depends on color temperature power.
- Size: L289*W130*H57mm.

Product Features


Model NO	GLM-PLS128C300 (ON/OFF)
Size	L289*W130*H57mm
Input Power	5W-7W-10W
Current	70mA-100mA-140mA
lumen Efficiency	120LM/W
Lumens Output	600Lm-840lm-1200lm
AC Input	AC200-240V
LED	SMD2835
Number of LED	336
Driver	AGT
Ra	90
CCT	3/4/6000K
SDCM	<5
Frequency	50/60Hz
Output Voltage	DC55-75V
Power Factor	>0.9
THD	<20%
Power Efficiency	>86%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Color	White/Black
Inner Box Size	L320*W140*H68mm
PCS/CTN	20PCS
Outer Box Size(L*W*H)	L700*W340*H300mm

Application



On the wall

Energy Efficiency Rating

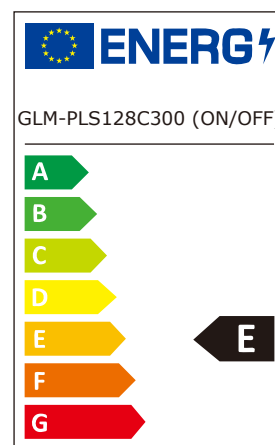

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: Block 14C, Zhonghaixin Tech-Park, Bulan Rd., Jihua St, Longgang, Shenzhen, Guangdong China